



Meridian Audio Limited
Latham Road, Huntingdon
Cambridgeshire PE29 6YE
United Kingdom


T +44(0)1480 445678
F +44(0)1480 445686
E info@meridian.co.uk
www.meridian-audio.com

Technical Note TN14

8th January 2008

F80 mains input fuse

The F80 is protected by an internal fuse which is soldered to the PCB adjacent to the mains inlet socket. Failure of this fuse prevents the unit from functioning in any way. Replacement of the fuse requires the unit to be dismantled in order to gain access to the PCB. Disassembly instructions are shown on Meridian Technical Note **TN9**.

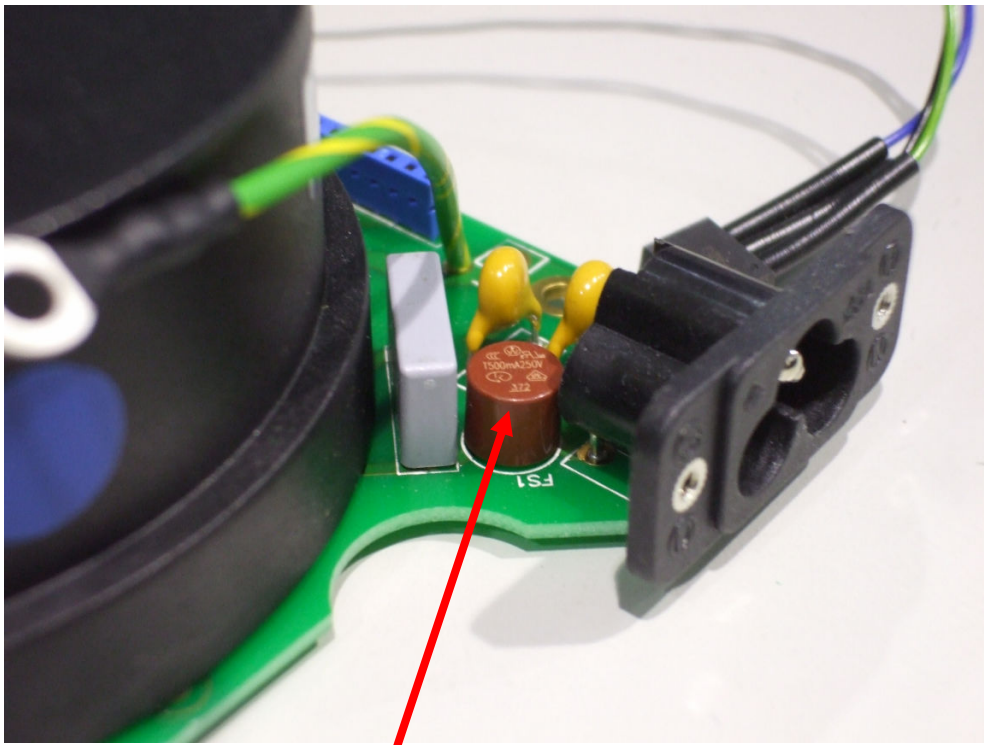

PCB-mounted fuse

Fuse values:

Operating voltage	Description	Meridian Part Number
220-240V	T500mA TR5 3720500000	G20316
115-120V	T1A TR5 3721100000	G20317
100V	T1.6A TR5 19372	G20318